


The MC-30S (MC-35S) microphone is provided with a 4P-connector to permit immediate connection to any KENWOOD transceiver.

If your transceiver is of another manufacturer, it may be necessary to change the connector wiring.

Check that the connector is properly wired before connecting to your transceiver.

4p-connector wiring

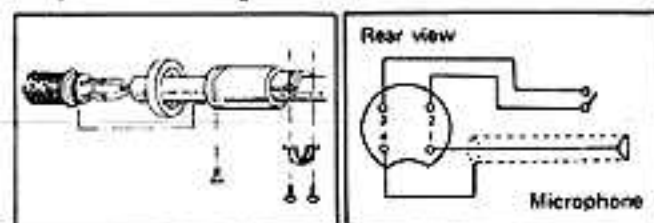

Close talk effects:

This selects bi-directional operation of the microphone which is designed to attenuate noise below 1 kHz.

Noise cancelling effect is best obtained when the microphone is held away from the noise source.

SPECIFICATIONS

	MC-30S	MC-35S
Type	Dynamic	+
Frequency response		
NORMAL	150 ~ 5000 Hz	+
NOISE CANCELLING	150 ~ 4000 Hz	+
Directivity		
NORMAL	Omini-directional	+
NOISE CANCELLING	Bi-directional	+
Dimensions		
Excluding protrusions	W52 x H84 x D38	+
Including protrusions	W58 x H120 x D45	+
Impedance	500 Ω	50 k Ω
Sensitivity		
NORMAL	-74 dB	-55 dB
NOISE CANCELLING	-78 dB (1000Hz, 2cm)	-58 dB (1000Hz, 2cm)
Weight	210 g	215 g

Downloaded by
RadioAmateur.EU

Close talk frequency response

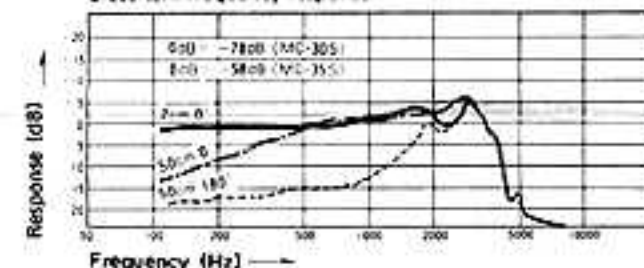


Fig. 4

Normal frequency response

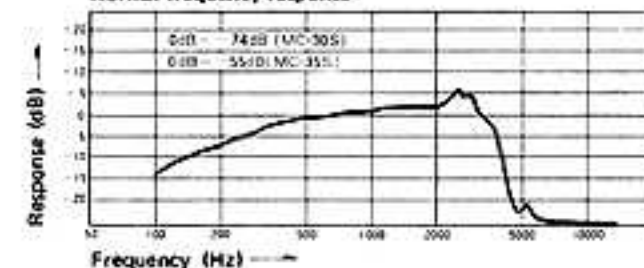


Fig. 5

Polar plot

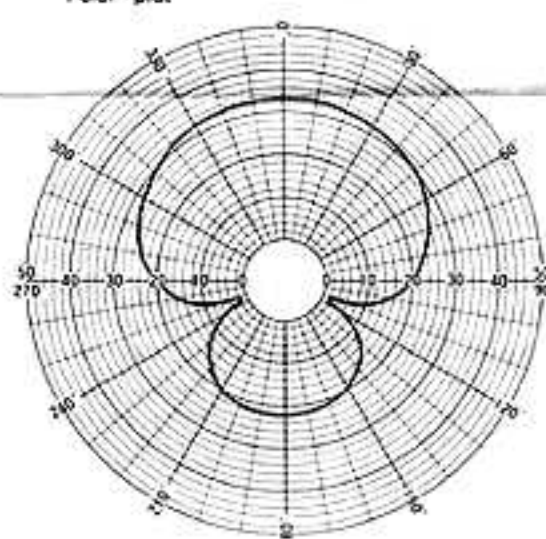


Fig. 6.