


Superstar 120

SCHEMATIC DIAGRAM

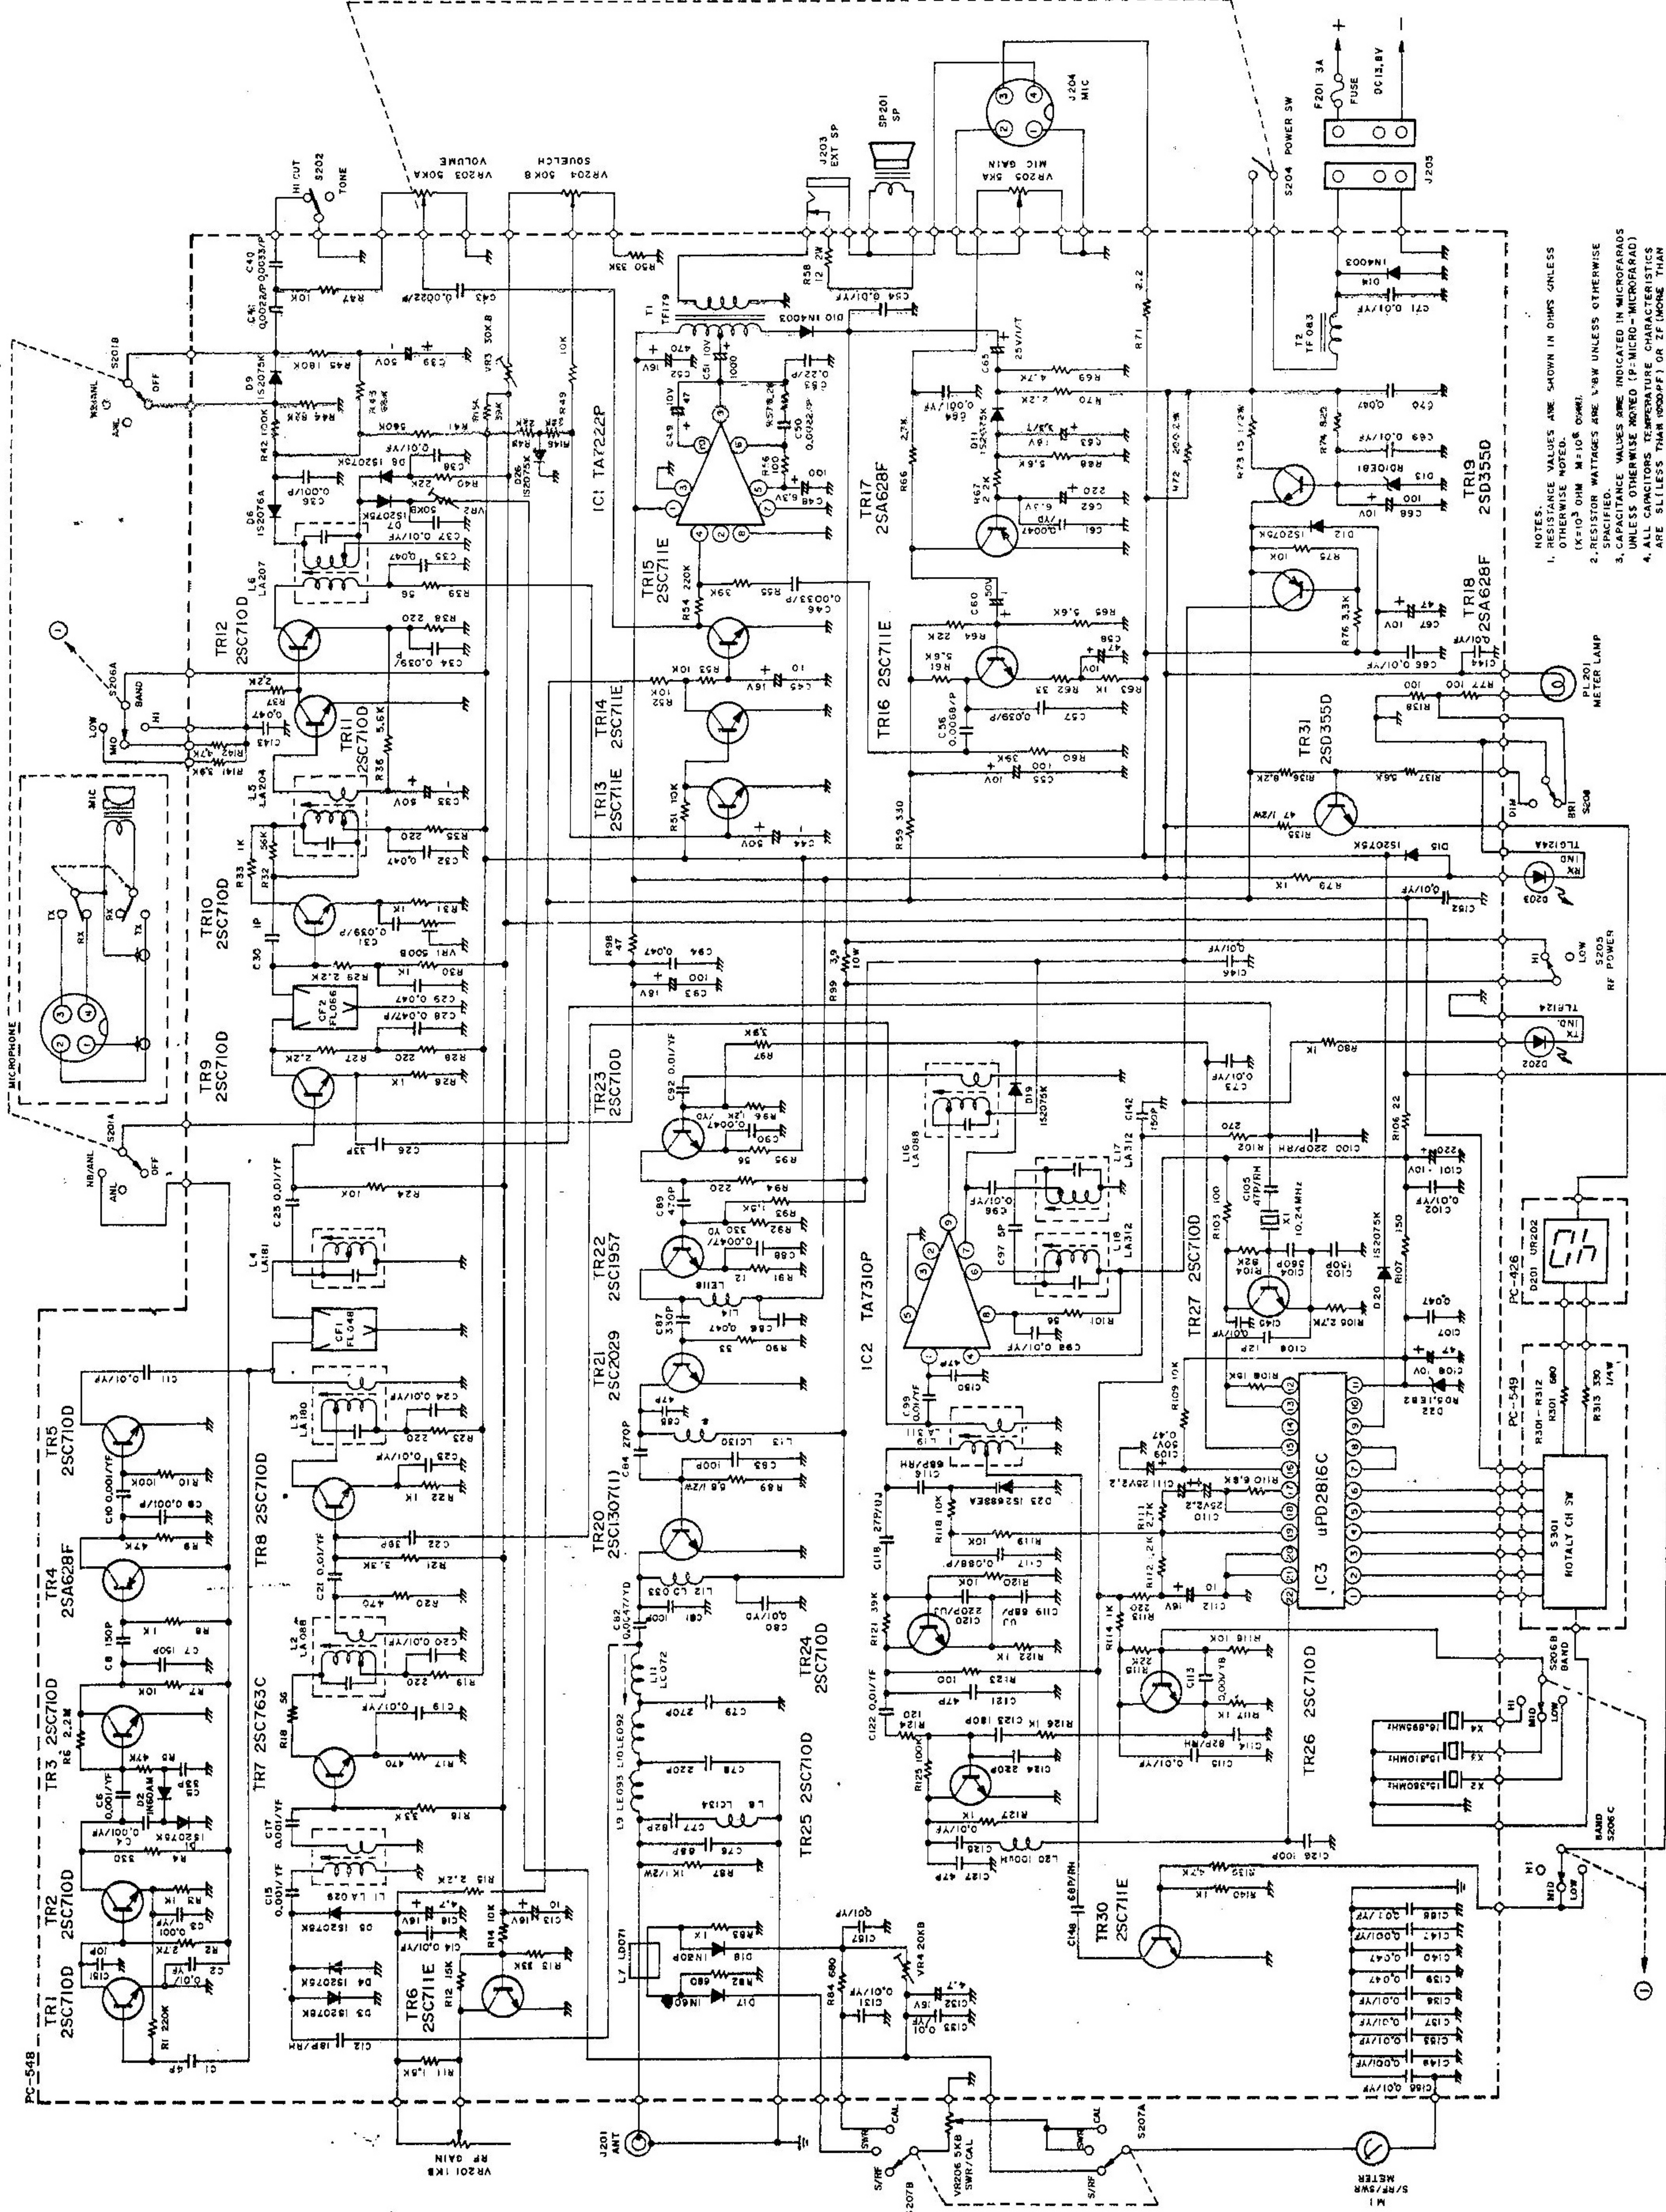

- NOTES:
1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED.
2. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED (P=PICTO, N=NEO, M=MICRO).
3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED (P=PICTO, N=NEO, M=MICRO).
4. ALL CAPACITORS TEMPERATURE CHARACTERISTICS ARE SLITLESS THAN 1000PPM OR 2F MORE THAN 1000PPM UNLESS OTHERWISE NOTED.