



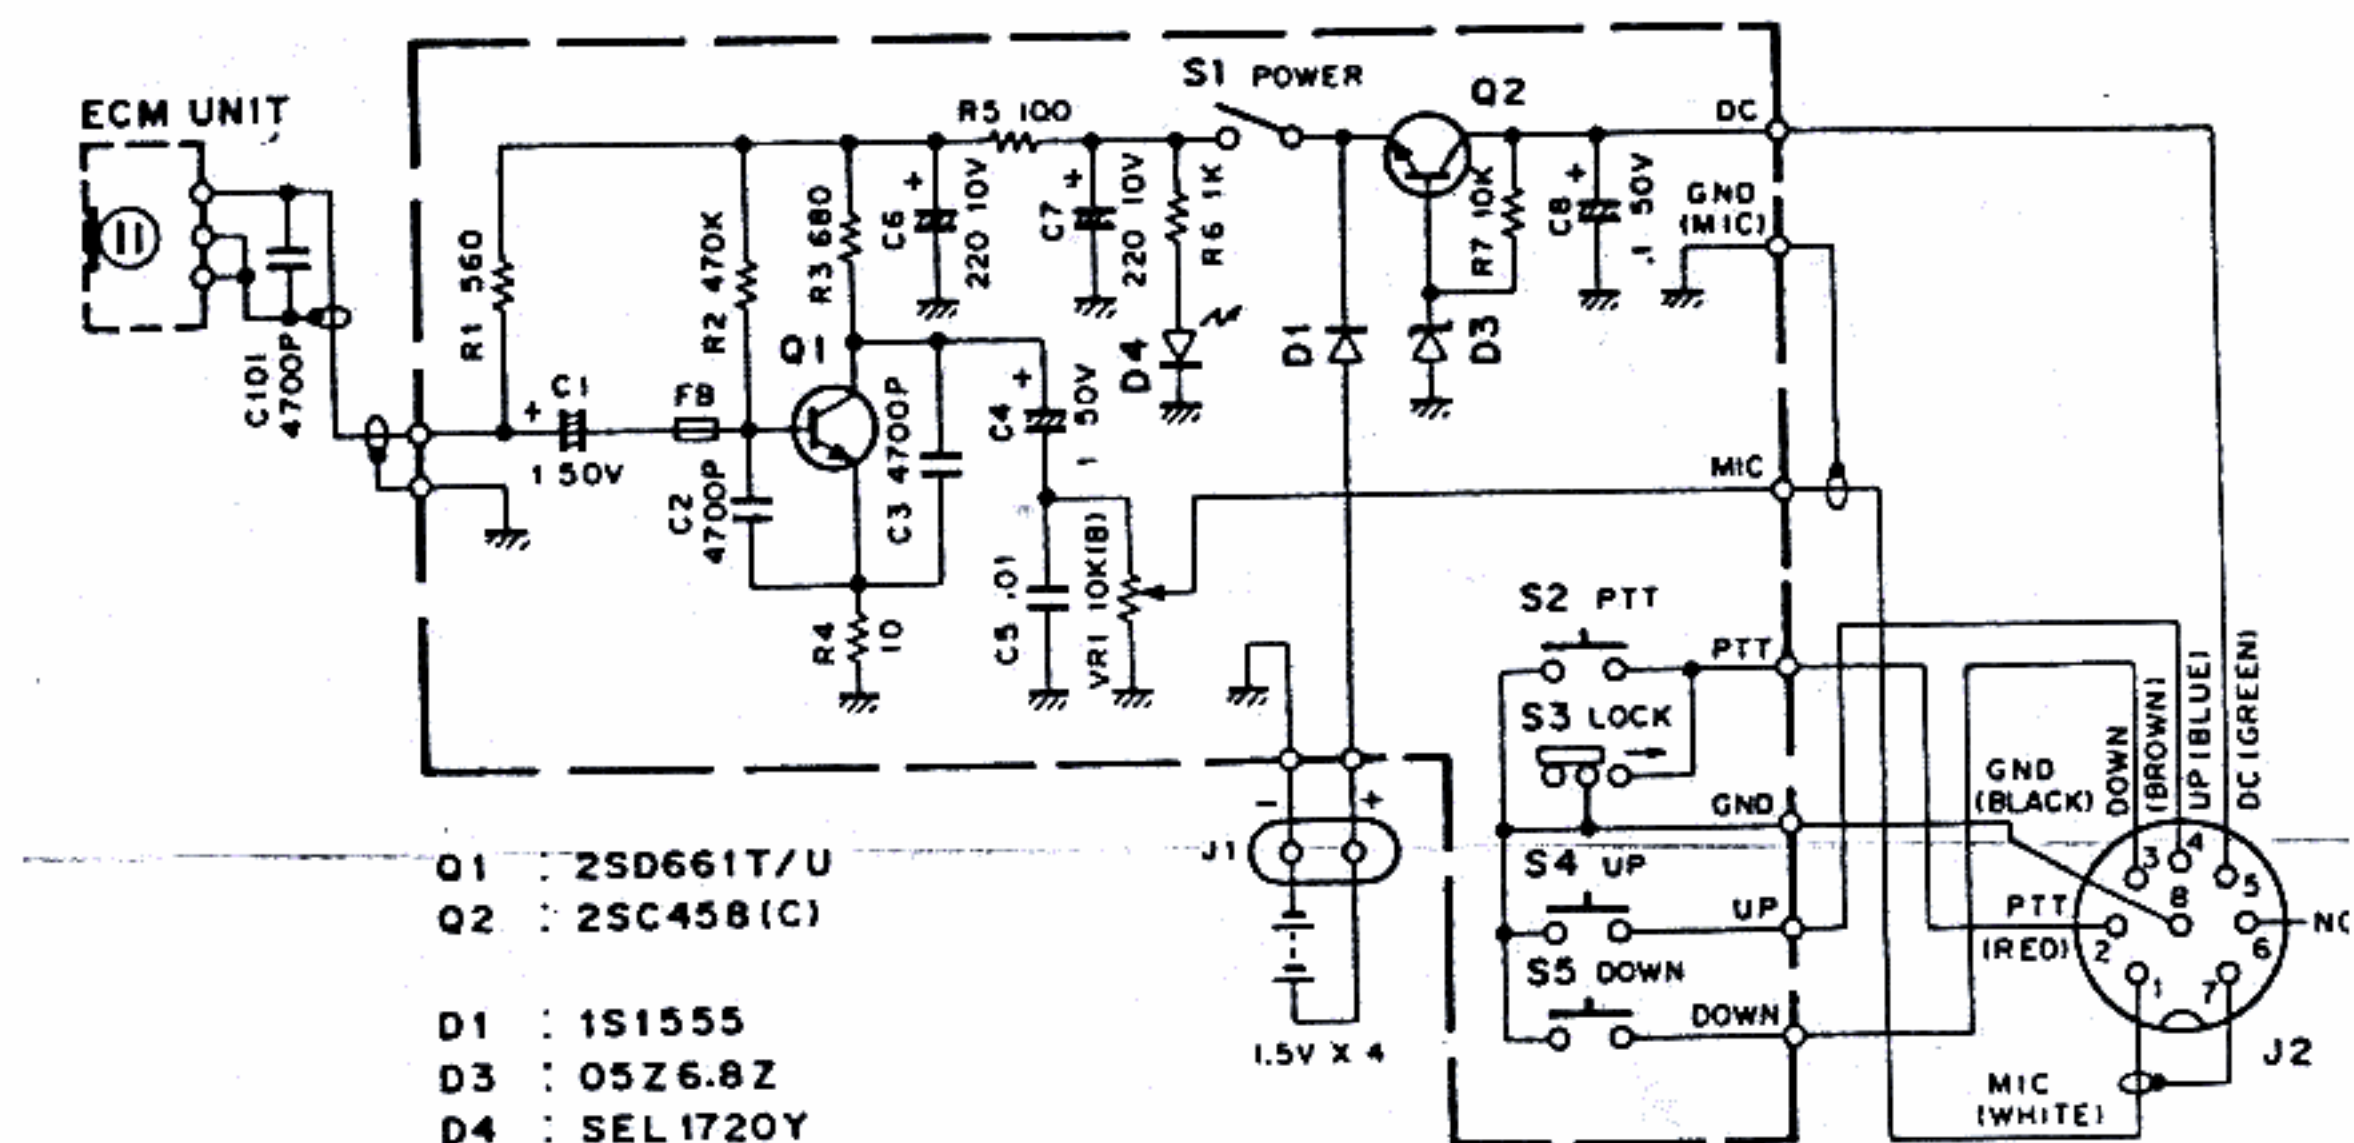


MC-80 DISASSEMBLY
Mic ass'y (T91-0339-08)

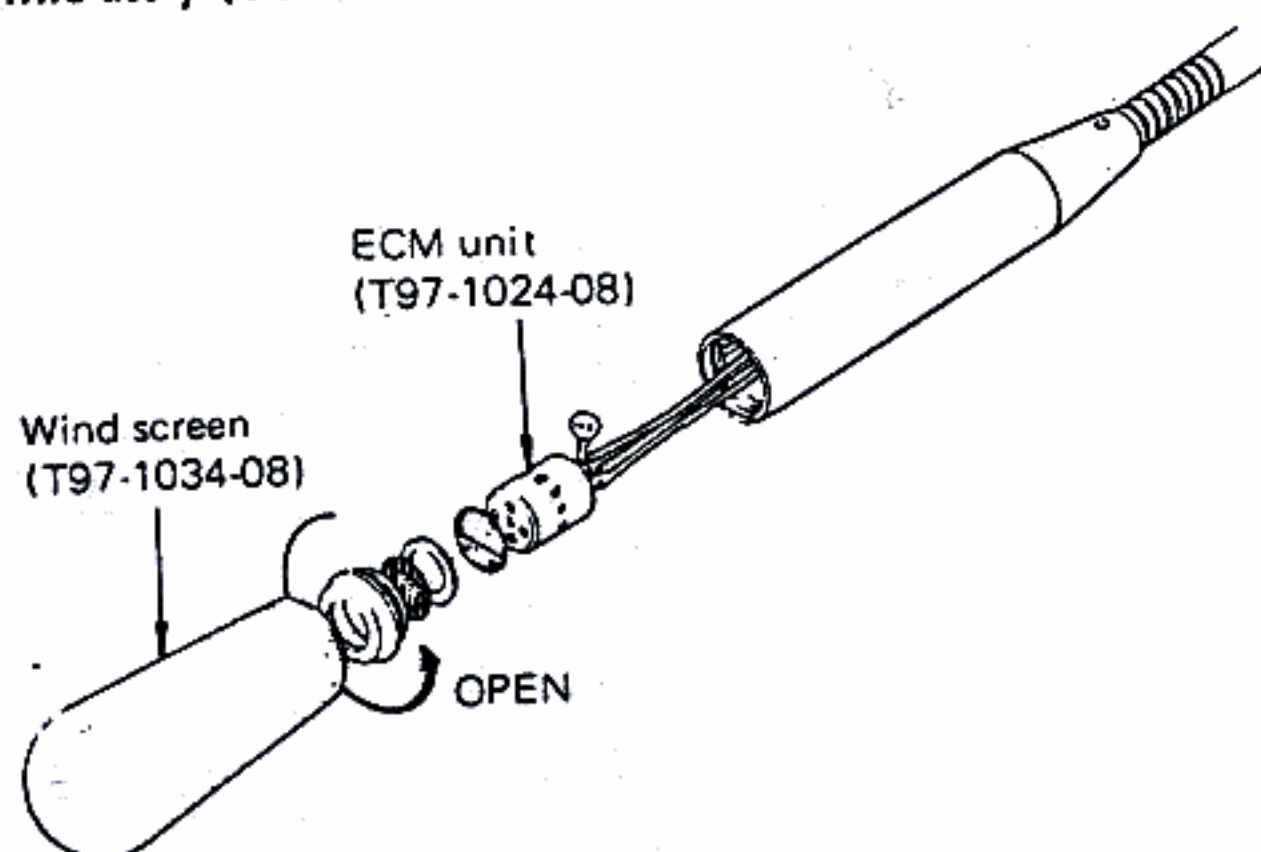

MC-80 SPECIFICATIONS

Type	Ominidirection electret condenser microphone
Impedance	Approx. 700Ω
Sensitivity	-40dB±6dB (VR MAX)
Frequency response	200-700Hz
Power supply	6V ("AA" batteries 1.5V x 4) Batteries not supplied.
Current consumption	Approx. 10mA (Batteries can be used more than 500 hours)
Weight	Approx. 700g (1.5lbs)

Downloaded by
Amateur Radio Directory
www.hamdirectory.info

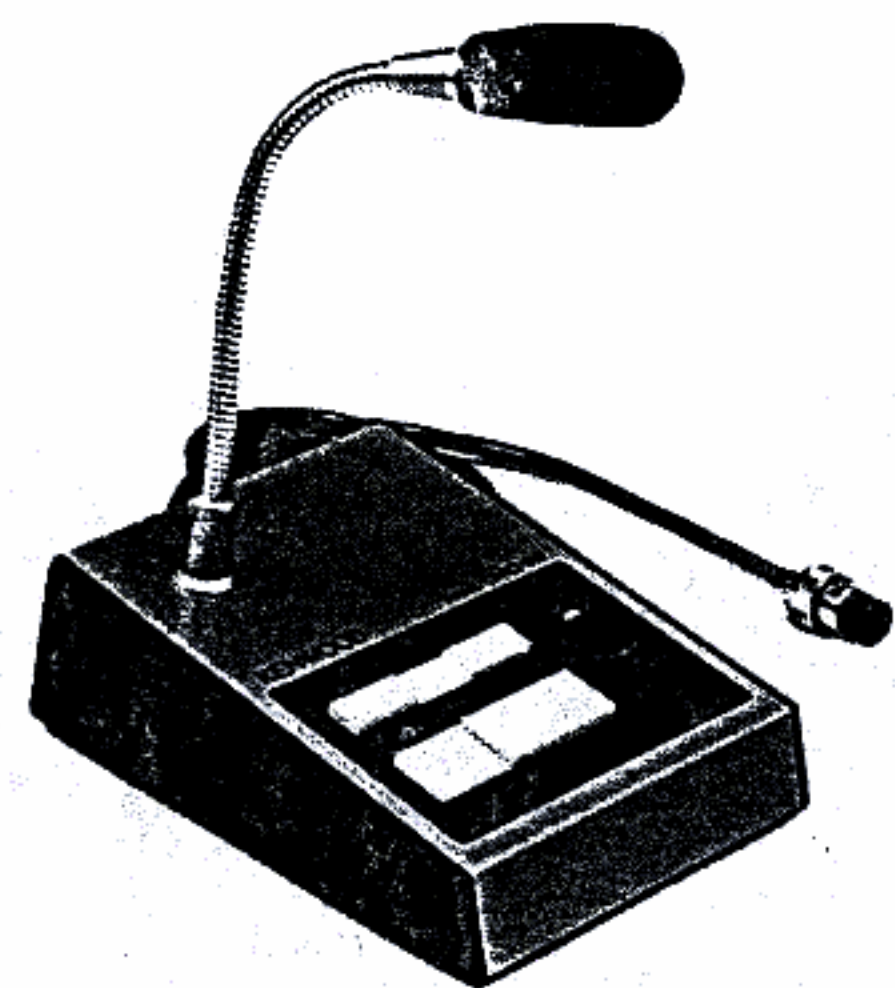

SCHEMATHEEK
Beh. T. Hultermans
Postbus 4228
5604 EE Eindhoven