



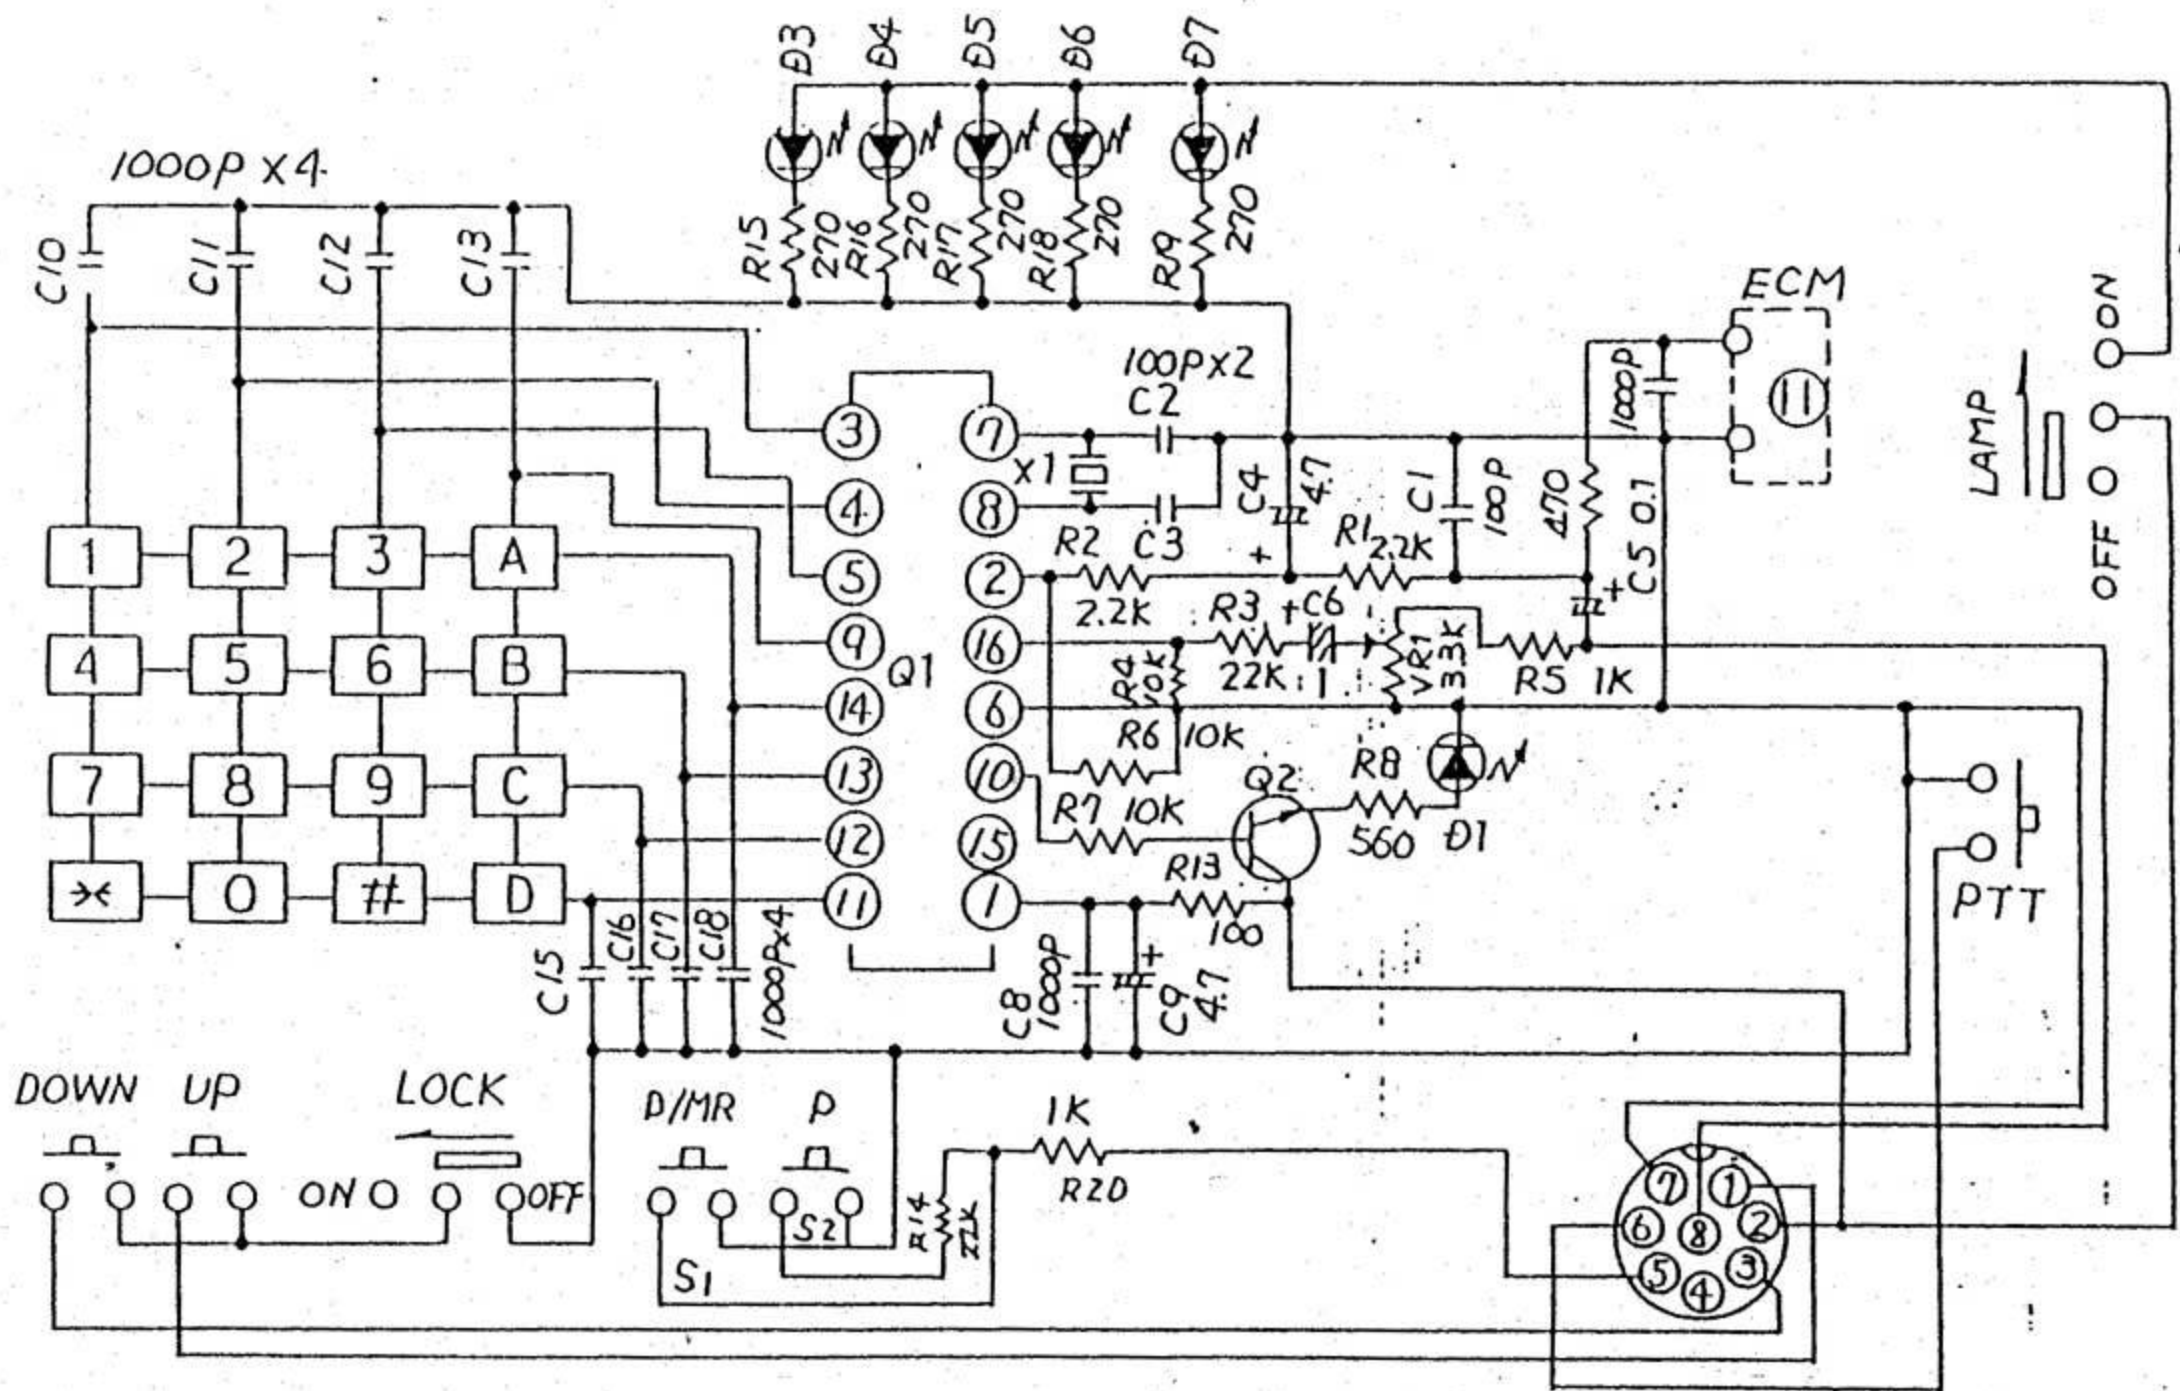



X1:CSAC 3.58MGCM(村田)相当
 D1:SEL1123R(サケン)相当
 D2:1SS307(東芝)相当
 D3~7:SLM-13DW(ロ-ル)相当
 Q1:LR40872(シャ-7°)相当
 Q2~4:2SC2412KR(ロ-ル)相当

測定用負荷回路



Downloaded by
RadioAmateur.EU

MH-27A8J Microphone (accessory)

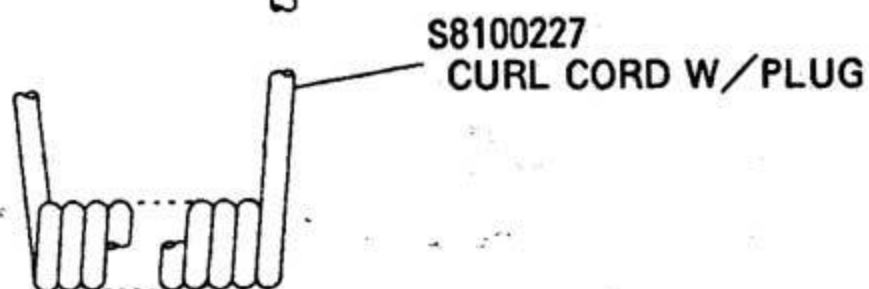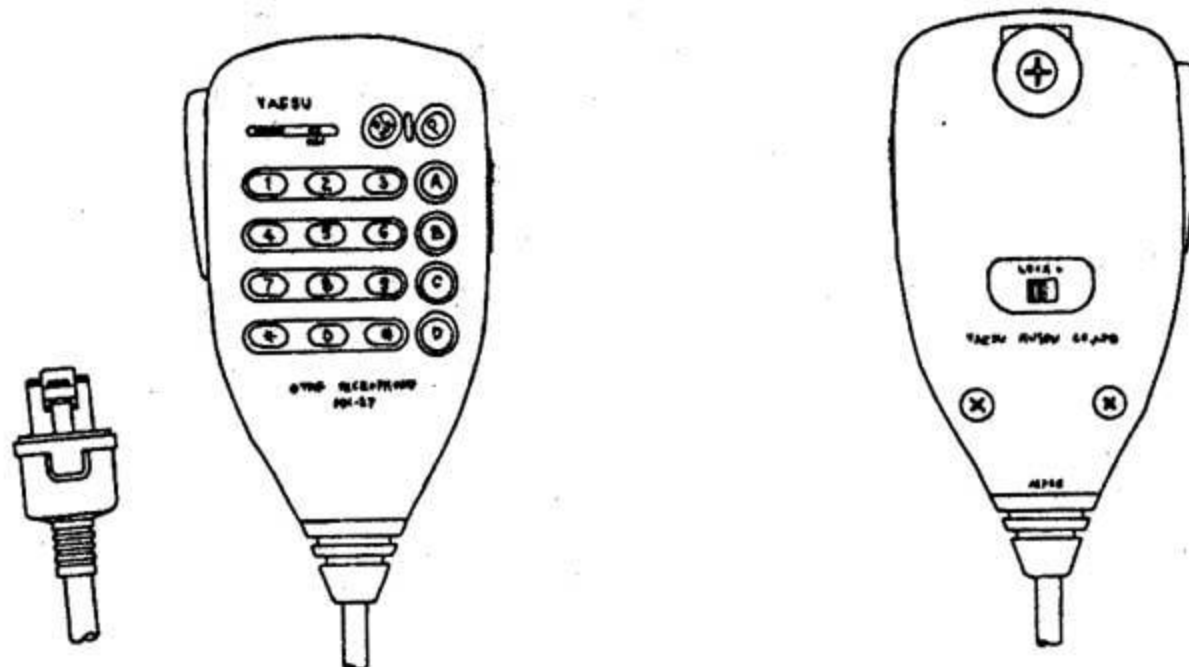


Specifications

Microphone Impedance: $1.5k\Omega$

Operating Temperature Range: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$

Voltage Requirement: $4.8\text{V} \sim 5.2\text{V}$

Downloaded by
RadioAmateur.EU



1. D/MR & P Button
2. N.C.
3. PTT Button
4. MicTx Audio
5. GND
6. +5V DC
7. Up Button
8. Down Button

